



Let's offer you a light



GUANGZHOU TIGER HEAD BATTERY GROUP CO.LTD.

Add: No.132 (SELF-GIVEN NO.68) NORTH GONGYE ROAD,
HAIZHU DISTRICT, GUANGZHOU, CHINA

Tel: 86-20-85539952/85539970

E-mail: gzit@555bf.com.cn

export@555bf.com.cn

Web: www.555bf.com.cn



The provision
of professional lighting solutions
专业照明解决方案



Product Catalogue 2014
www.555bf.com.cn

GLOBAL NETWORK

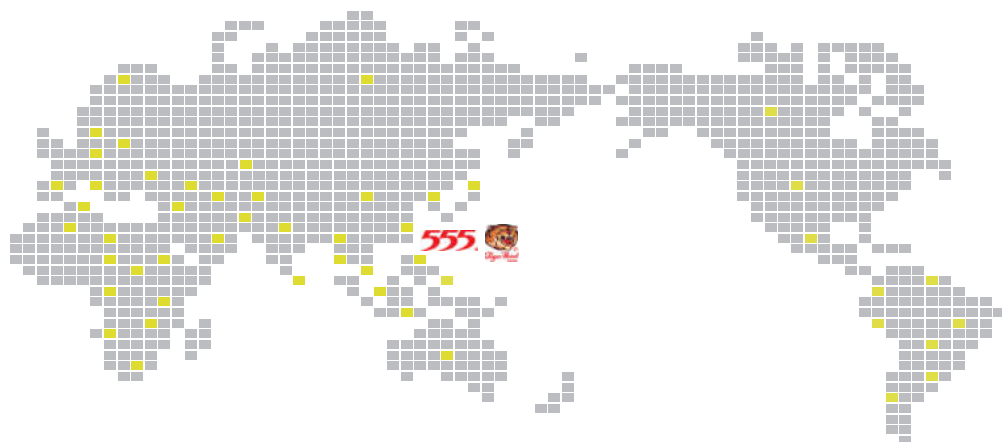


Table of Contents

LED INDOOR SERIES

室内灯系列

07-20 LED LIGHT SOURCE SERIES
LED 光源系列

21-24 LED FIXTURE SERIES
LED 支架灯系列

25-32 LED DOWN LIGHT SERIES
LED 筒灯系列

33-42 LED SPOTLIGHT SERIES
LED 射灯系列

43-46 LED GRILLE SERIES
LED 格栅灯系列

47-50 LED TRACK LIGHT SERIES
LED 导轨灯系列

51-52 LED PANEL LIGHT SERIES
LED 平板灯系列


53-60 LED HIGH BAY LIGHT
LED 工矿灯系列

LED OUTDOOR SERIES

户外灯系列

61-70 LED FLOOD LIGHT SERIES
LED 投光灯系列

71-78 LED STREET LIGHT SERIES
LED 工矿灯系列

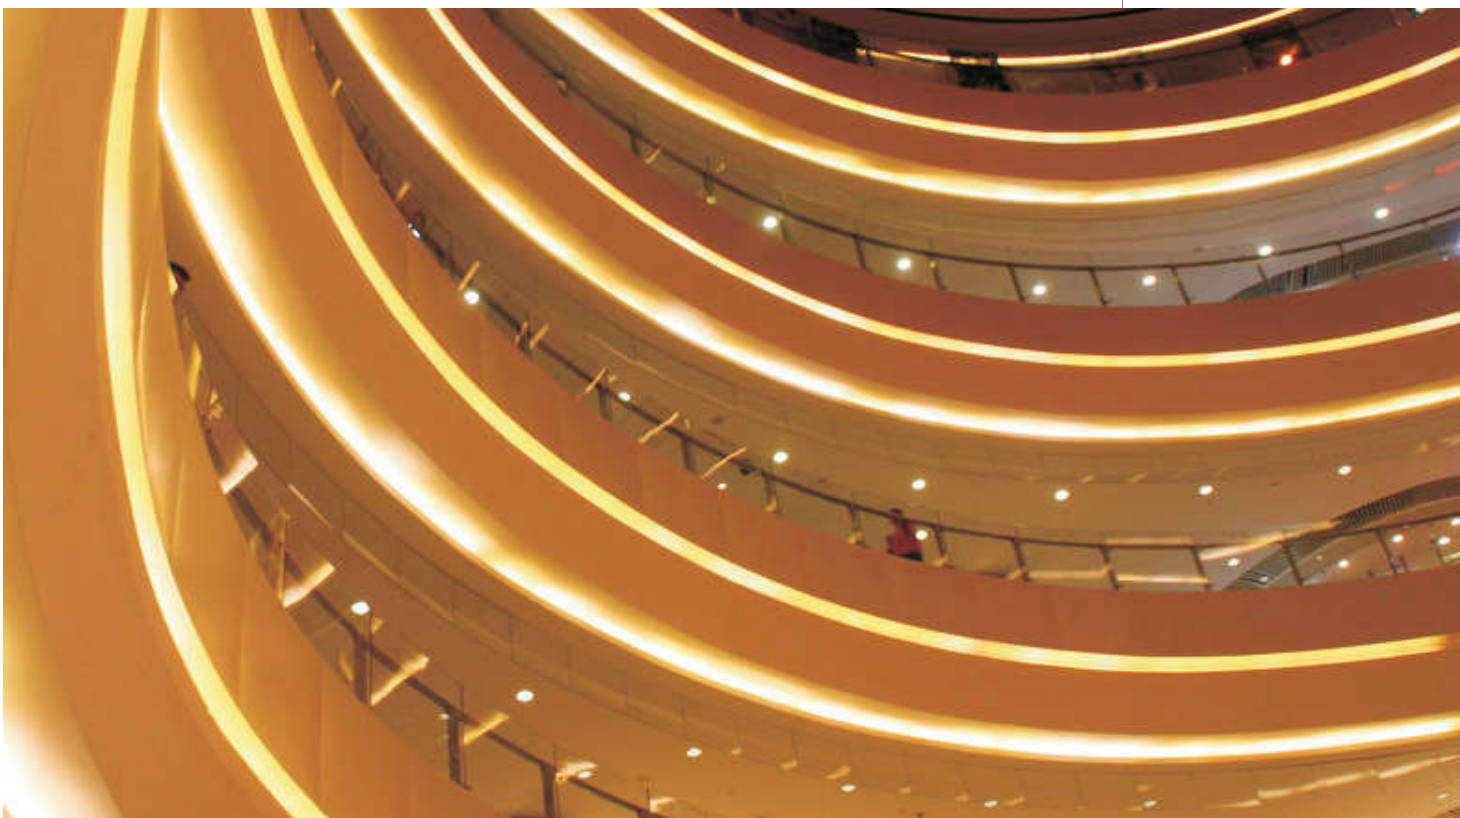

LED INDOOR SERIES

LED 室内系列

LED LIGHT SOURCE SERIES

LED 光源系列

LED FIXTURE SERIES

LED 支架灯系列

LED DOWN LIGHT SERIES

LED 筒灯系列

LED SPOTLIGHT SERIES

LED 射灯系列

LED GRILLE SERIES

LED 格栅灯系列

LED TRACK LIGHT SERIES

LED 导轨灯系列

LED PANEL LIGHT SERIES

LED 平板灯系列

LED HIGH BAY LIGHT

LED 工矿灯系列

THE LIGHT SOURCE SERIES
LED 光源系列


Product Description

产品说明


Features:
Energy saving, high luminous efficiency, long service life, replace traditional halogen lighting products.

Applications:
Families, Schools, Hotels, Restaurants, Villas, Shopping malls and other indoor lighting.

性能特点：节能环保、高光效、使用寿命长、取代传统的卤素照明产品。
适用场所：家庭、学校、酒店、餐厅、别墅、商场等室内照明。



LY-MARS1-MR16

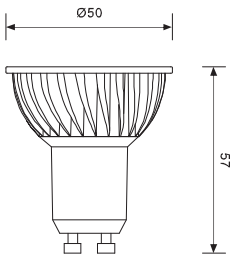

LY-MARS1-GU10





Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-MARS1-MR16	AC/DC12V	3W	GU5.3	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH46mm
LY-MARS1-GU10	AC85-265V	3W	GU10	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH57mm





LY-MARS2-MR16



LY-MARS3-MR16



LY-MARS2-GU10



LY-MARS3-GU10

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-MARS2-MR16	AC/DC12V	4W	GU5.3	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH47mm
LY-MARS2-GU10	AC85-265V	4W	GU10	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH56mm


Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-MARS3-MR16	AC/DC12V	4.5W	GU5.3	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH47mm
LY-MARS3-GU10	AC85-265V	4.5W	GU10	35,000 hrs	2700K-6500K	80 Ra	60°	Ø50XH60mm



LY-MARS4-MR16




LY-MARS4-GU10




Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-MARS4-MR16	AC85~265V	9W	GU5.3	35,000 hrs	2700K~6500K	70 Ra	60°	Ø50XH97mm
LY-MARS4-GU10	AC85~265V	9W	GU10	35,000 hrs	2700K~6500K	70 Ra	60°	Ø50XH97mm



LED G4 BULB / LED G4 灯珠

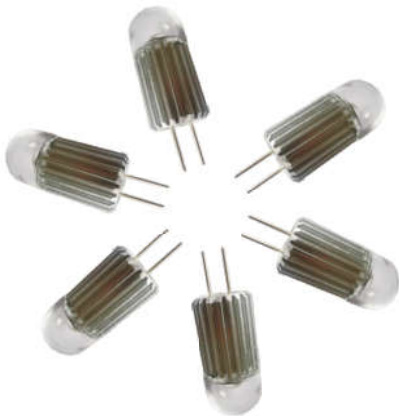

Performance Summary


规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-LED-G4	AC/DC12V	1W	G4	35,000 hrs	2700K~6500K	80 Ra	60°	Ø13XH38mm


LED INDOOR SERIES
LED 室内系列



LY-SPARK1




LY-SPARK2




Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-SPARK1	AC85~265V	3W	E14	35,000 hrs	2700K~6500K	80 Ra	60°	Ø36XH120mm
LY-SPARK2	AC85~265V	3W	E14	35,000 hrs	2700K~6500K	80 Ra	60°	Ø36XH105mm



LY-PLANET60-1



LY-PLANET60-2




Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLANET60-1	AC85~265V	3/5/7W	E27/B22	35,000 hrs	2700K~6500K	80 Ra	120°	Ø60XH115mm
LY-PLANET60-2	AC85~265V	3/5/7W	E27/B22	35,000 hrs	2700K~6500K	80 Ra	120°	Ø60XH115mm


LED INDOOR SERIES
LED 室内系列



LY-PLANET60-3




LY-PLANET60-4




Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLANET60-3	AC85-265V	3/5W	E27/B22	35,000 hrs	2700K-6500K	80 Ra	120°	Ø60XH118mm
LY-PLANET60-4	AC85-265V	3/5/8W	E27/B22	35,000 hrs	2700K-6500K	80 Ra	120°	Ø60XH112mm



LY-PLC-1A



LY-PLC-1B




Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Lumen 流明	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLC-1A	AC85-265V	5W	G24	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	Ø40 x H138mm
LY-PLC-1B	AC85-265V	8W	G24	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	Ø40 x H205mm


LED INDOOR SERIES
LED 室内系列



LY-PLC-2A




LY-PLC-2B




Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Luminous Efficacy 流明	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLC-2A	AC85-265V	5W	E27	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	Ø40 x H148mm
LY-PLC-2B	AC85-265V	8W	E27	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	Ø40 x H215mm



LY-PLC-3A



LY-PLC-3B



LY-PLC-3C

Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Luminous Efficacy 流明	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLC-3A	AC85-265V	7W	G24	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	L138 x W40 x H40mm
LY-PLC-3B	AC85-265V	9W	G24	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	L138 x W40 x H40mm
LY-PLC-3C	AC85-265V	11W	G24	80-90lm/W	35,000 hrs	2700K-6500K	85 Ra	120°	L159 x W40 x H40mm

Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Base 灯头	Luminous Efficacy 流明	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-PLC-4A	AC85-265V	7W	E27	80-90lm/W	35,000 hrs	2700K~6500K	85 Ra	120°	L141 x W40 x H40mm
LY-PLC-4B	AC85-265V	9W	E27	80-90lm/W	35,000 hrs	2700K~6500K	85 Ra	120°	L141 x W40 x H40mm
LY-PLC-4C	AC85-265V	11W	E27	80-90lm/W	35,000 hrs	2700K~6500K	85 Ra	120°	L161 x W40 x H40mm




LY-PLC-4A



LY-PLC-4B



LY-PLC-4C




Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lumen 流明	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-AR111-1R	AC/DC 12V	10W	300-450lm	35,000 hrs	2700K~6500K	80 Ra	20°	Ø111 x 61.5mm
LY-AR111-2	AC/DC 12V	9W	550-650lm	35,000 hrs	2700K~6500K	80 Ra	60°	Ø111 x H65mm
LY-AR111-3	AC/DC 12V	12W	700-800lm	35,000 hrs	2700K~6500K	80 Ra	45°	Ø111 x H65mm




LY-AR111-1R



LY-AR111-2



LY-AR111-3



LED FIXTURE SERIES
LED 支架灯系列

Product Description

产品说明

Features:
Long lifespan, well heat dissipation, high brightness, energy saving, UV/IR Free.

Applications:
Can be widely applied to the family, shopping malls, schools, factories, office, office buildings, hospitals and other indoor lighting.

性能特点：使用寿命长、散热性能佳、亮度高、节能、无紫外线、红外线等辐射。
适用场所：可广泛应用于家庭、商场、学校、工厂、办公室、高级写字楼、医院及各种室内照明。


Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Length 长度	Lamp Life 使用寿命	Color Temperature 色温	Lumens Efficacy 流明值	CRI 显色指数
LY-LEDT8-60	AC85-265V	9W	600mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT8-90	AC85-265V	12W	900mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT8-120	AC85-265V	18W	1200mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT8-150	AC85-265V	22W	1500mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra



T8 LED Tube /T8 LED灯管




Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Length 长度	Lamp Life 使用寿命	Color Temperature 色温	Lumens Efficacy 流明值	CRI 显色指数
LY-LEDT4-A	AC85-265V	2W	150mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT4-B	AC85-265V	4W	285mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT4-C	AC85-265V	5W	435mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT4-D	AC85-265V	10W	815mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT4-E	AC85-265V	13W	1115mm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra




Adjustable T4 LED Fixture
可调角度T4 LED支架

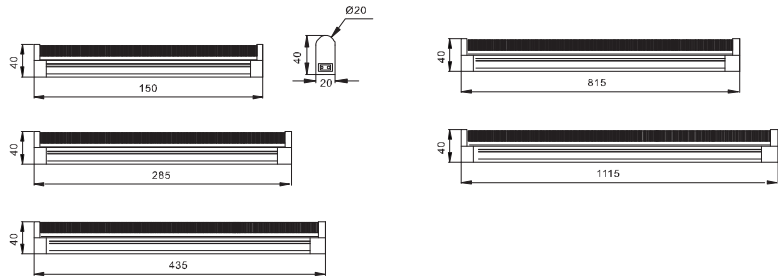

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Length 长度	Lamp Life 使用寿命	Color Temperature 色温	Lumens Efficacy 流明值	CRI 显色指数
LY-LEDT5-30	AC85-265V	3W	30cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-60	AC85-265V	7W	60cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-90	AC85-265V	9W	90cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-120	AC85-265V	12W	120cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra




T5 LED Tube / T5 LED灯管

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Length 长度	Lamp Life 使用寿命	Color Temperature 色温	Lumens Efficacy 流明值	CRI 显色指数
LY-LEDT5-1A	AC85-265V	3W	60cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-1B	AC85-265V	7W	90cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-1C	AC85-265V	9W	120cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5-1D	AC85-265V	12W	150cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra

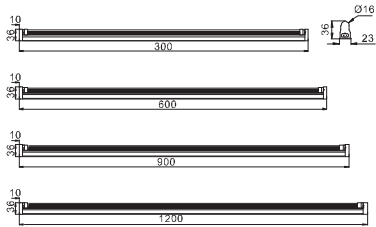

T5 LED Fixture / T5 LED支架


Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Length 长度	Lamp Life 使用寿命	Color Temperature 色温	Lumens Efficacy 流明值	CRI 显色指数
LY-LEDT5I-2A	AC85-265V	3W	30cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5I-2B	AC85-265V	7W	60cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5I-2C	AC85-265V	9W	90cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra
LY-LEDT5I-2D	AC85-265V	12W	120cm	35,000 hrs	2700K~6500K	80~100 LM/W	80-85Ra



T5 LED Integrated Fixture / T5 LED一体化支架

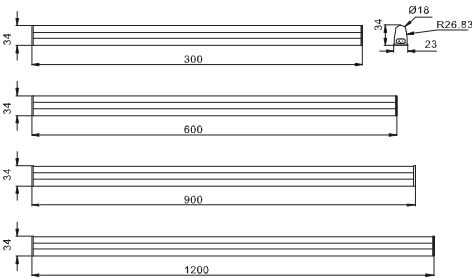

LED DOWN LIGHT SERIES

LED 筒灯系列

Product Description

产品说明

Features:

Energy saving, long lifespan, color rendering, good heat dissipation, stability performance.

Applications:


Homes, Offices, Hotels, Bars, Villas, Shopping malls and other indoor lighting.

性能特点: 节能环保、使用寿命长、显色性高、散热性能良好、性能稳定。


适用场所: 家庭、办公室、酒店、酒吧、别墅、商场等室内照明。






LY-ECOBR-4''



LY-ECOBR-6''



LY-ECOBR-8''

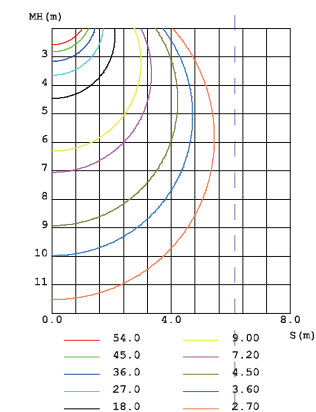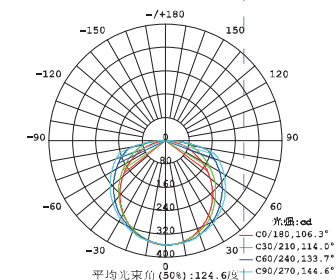Luminous Intensity Distribution Curve
配光曲线



Performance Summary

规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-ECOBR-4''	AC85-265V	8W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 145	Ø163XH72
LY-ECOBR-6''	AC85-265V	10W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 170	Ø190XH75
LY-ECOBR-8''	AC85-265V	15W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 210	Ø220XH80



LY-EDGR-4''




LY-EDGR-5''

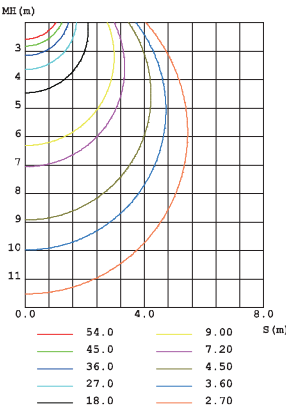


Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDGR-4''	AC85~265V	7W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 120mm	Ø144XH45
LY-EDGR-5''	AC85~265V	9W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 155mm	Ø180XH50
LY-EDGR-6''	AC85~265V	15W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 175mm	Ø200XH55
LY-EDGR-8''	AC85~265V	25W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 200mm	Ø230XH57



LY-EDGR-6''





LY-EDGR-8''







LY-EDRR-3''




LY-EDRR-4''

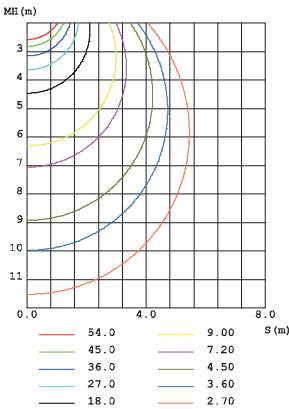

Performance Summary
规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDRR-3''	AC85~265V	6W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 88	Ø100XH50mm
LY-EDRR-4''	AC85~265V	11W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 128	Ø143XH70mm
LY-EDRR-5''	AC85~265V	14W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 160	Ø180XH70mm
LY-EDRR-6''	AC85~265V	17W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 177	Ø200XH70mm
LY-EDRR-8''	AC85~265V	25W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	Ø 205	Ø230XH85mm



LY-EDRR-5''





LY-EDRR-6''



LY-EDRR-8''



LY-EDSR-3''

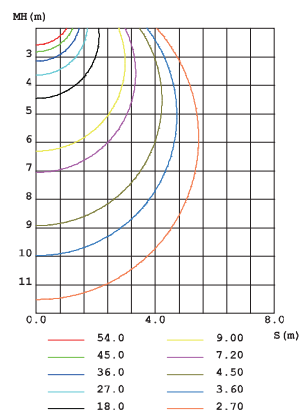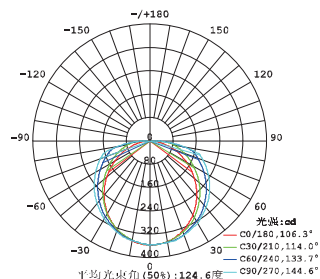Luminous Intensity Distribution Curve
配光曲线

LY-EDSR-4''






LY-EDSR-6''



Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDSR-3''	AC85-265V	7W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 95	Ø108XH32mm
LY-EDSR-4''	AC85-265V	14W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 135	Ø155XH33mm
LY-EDSR-6''	AC85-265V	17W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 160	Ø178XH33mm

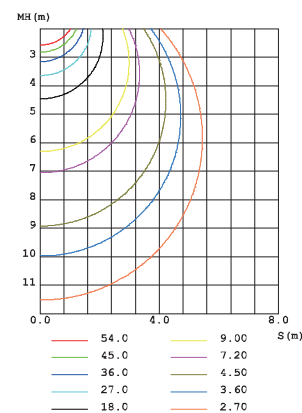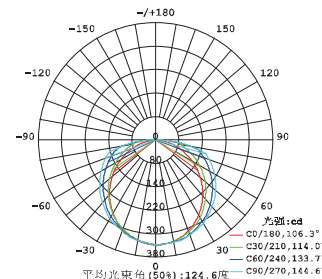Luminous Intensity Distribution Curve
配光曲线

LY-EDSS-3''



LY-EDSS-4''



LY-EDSR-6''

Performance Summary


规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDSS-3''	AC85-265V	7W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 95x95	W108XL108XH32mm
LY-EDSS-4''	AC85-265V	14W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 135x135	W155XL155XH33mm
LY-EDSR-6''	AC85-265V	17W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 160x160	W178XL178XH33mm

LED INDOOR SERIES
LED 室内系列




Adjustable LED Down Light
可调角度LED筒灯




Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-ADLR-1	AC85~265V	20W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	∅ 168	∅175XH180mm



Adjustable LED Down Light
可调角度LED筒灯



Adjustable LED Down Light
可调角度LED筒灯

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-ADLS-1	AC85~265V	20W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	∅ 178x178	L188xW188xH180mm
LY-ADLS-2	AC85~265V	40W	35,000 hrs	2700K~6500K	IP44	-30°C~50°C	∅ 339x178	L349xW188xH180mm

LED SPOTLIGHT SERIES
LED 射灯系列



Product Description
产品说明

Features:
Energy saving and environmental protection, long lifespan, can replace traditional halogen lighting source.


Applications:
Family, Hotel, Restaurant, Villa, Mall and the other indoor lighting conditions.

性能特点：节能环保，使用寿命长，可以替换传统的卤素灯光源。


适用场所：家庭、酒店、餐厅、酒吧、别墅、商场等室内照明。

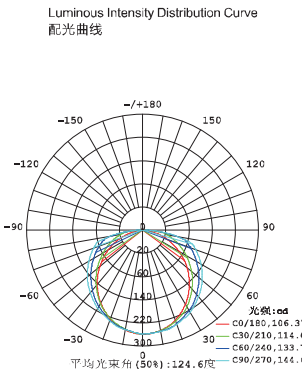

LY-EDBR-3W



LY-EDBR-5W





LY-EDBR-7W

Performance Summary
规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDBR-3W	AC85-265V	3W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 75	Ø90XH58
LY-EDBR-5W	AC85-265V	5W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 92	Ø110XH87
LY-EDBR-7W	AC85-265V	7W	35,000 hrs	2700K-6500K	IP44	-30°C-50°C	Ø 92	Ø110XH87



LY-EDBR-9W

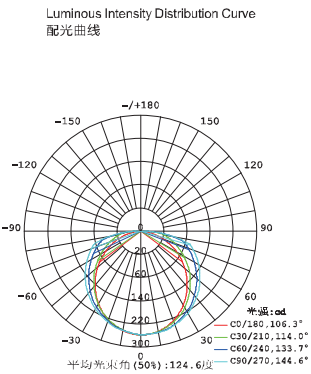



LY-EDTR-12W

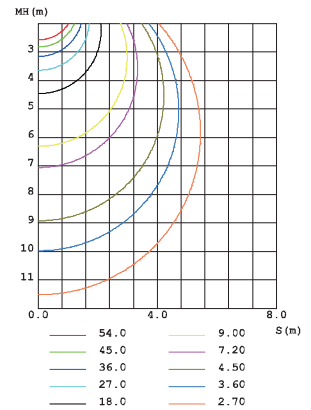



Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDBR-9W	AC85~265V	9W	35,000 hrs	2700K~6500K	IP65	-30°C~50°C	Ø 120	Ø140XH85mm
LY-EDBR-12W	AC85~265V	12W	35,000 hrs	2700K~6500K	IP65	-30°C~50°C	Ø 120	Ø140XH85mm

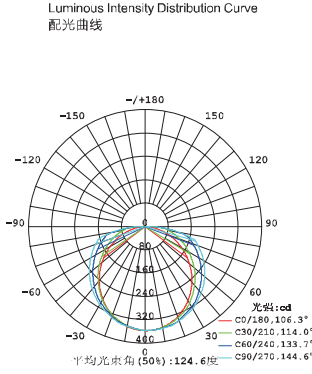

LY-EDTR-3W

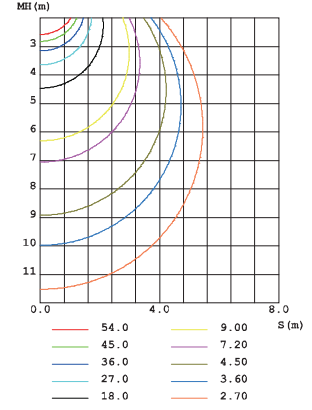

LY-EDTR-5W

Performance Summary
规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDTR-3W	AC85~265V	3W	35,000 hrs	2700K~6500K	IP65	-30°C~50°C	Ø 70	Ø88XH40mm
LY-EDTR-5W	AC85~265V	5W	35,000 hrs	2700K~6500K	IP65	-30°C~50°C	Ø 95	Ø110XH65mm

Performance Summary
规格参数




Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Ingress Protection 防护等级	Working Temperature 工作温度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-EDTR-7W	AC85~265V	7W	35,000 hrs	2700K~6500K	IP65	-20°C~50°C	Ø 95	Ø110XH65mm
LY-EDTR-9W	AC85~265V	9W	35,000 hrs	2700K~6500K	IP65	-20°C~50°C	Ø 115	Ø138XH65mm
LY-EDTR-12W	AC85~265V	12W	35,000 hrs	2700K~6500K	IP65	-20°C~50°C	Ø 115	Ø138XH65mm
LY-EDTR-15W	AC85~265V	15W	35,000 hrs	2700K~6500K	IP65	-20°C~50°C	Ø 140	Ø160XH100mm
LY-EDTR-18W	AC85~265V	18W	35,000 hrs	2700K~6500K	IP65	-20°C~50°C	Ø 140	Ø160XH100mm




LY-EDTR-7W

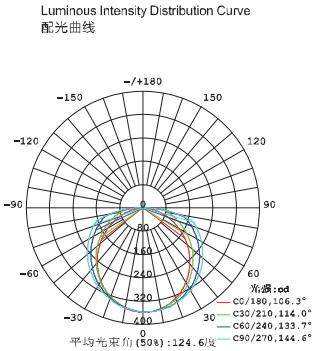


LY-EDTR-9W

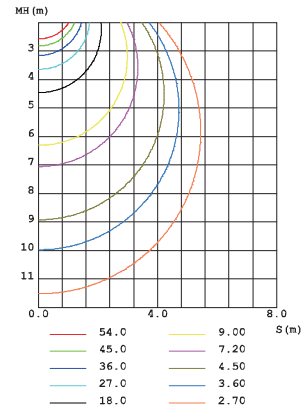

LY-EDTR-12W




LY-EDTR-15W



LY-EDTR-18W

LED INDOOR SERIES

LED 室内系列




Dimmable LED Down Light
可调光LED筒灯

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-SMART2.5	AC85-265V	10W	35,000 hrs	2700K-6500K	75 Ra	30°	Ø 83mm	Ø90XH63.5



Dimmable LED Down Light
可调光LED筒灯

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-SMART6	230V	16W	35,000 hrs	2700K-6500K	80 Ra	90°	Ø 180	W290 x W190 x H80mm



LED GRILLE LIGHT SERIES

LED 格栅灯系列

Product Description

产品说明

Features:


Can replace halogen lighting source

Applications:

Hotel, Restaurant, Villa, Mall and the other indoor lighting conditions.

性能特点：可替换卤素豆胆灯光源





适用场所：酒店、餐厅、酒吧、别墅、商场等室内照明。



Performance Summary

规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-AR16-1	AC85~265V	3W	35,000 hrs	2700K~6500K	80-85 Ra	W100xL100	W130 x L130xH110mm
LY-AR16-2	AC85~265V	6W	35,000 hrs	2700K~6500K	80-85 Ra	W100xL190	W130 x L225 x H110mm
LY-AR16-3	AC85~265V	9W	35,000 hrs	2700K~6500K	80-85 Ra	W100xL280	W130x L310 x H110mm

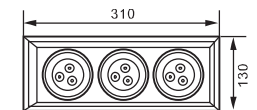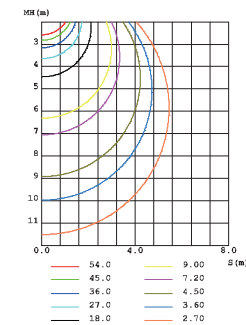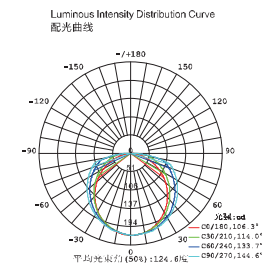



LED INDOOR SERIES
LED 室内系列




LY-AR70-1



LY-AR70-2



LY-AR70-3



Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Cutting Hole 开孔尺寸	Measurement 产品尺寸
LY-AR70-1	AC85~265V	7W	35,000 hrs	2700K~6500K	80-85 Ra	W115XL115	W145 x L145 x H110mm
LY-AR70-2	AC85~265V	14W	35,000 hrs	2700K~6500K	80-85 Ra	W115XL220	W145 x L250 x H110mm
LY-AR70-3	AC85~265V	21W	35,000 hrs	2700K~6500K	80-85 Ra	W115XL320	W145 x L350 x H110mm








LY-SHOOTER1



LY-SHOOTER2



LY-SHOOTER4



Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Measurement 产品尺寸
LY-SHOOTER1	AC85~265V	10W	35,000 hrs	2700K~6500K	80-85 Ra	20°	W208 x L208 x H120mm
LY-SHOOTER2	AC85~265V	21W	35,000 hrs	2700K~6500K	80-85 Ra	20°	W208 x L373 x H120mm
LY-SHOOTER4	AC85~265V	42W	35,000 hrs	2700K~6500K	80-85 Ra	20°	W360 x L360 x H120mm

THE TRACK LIGHT SERIES
LED 导轨灯系列

Product Description

产品说明

Features:
New-model adjustable spot light, which can be used for basic lighting, and also accent lighting.

Applications:
Park, Hotel, Restaurant, Villa, Mall and the other indoor lighting conditions.

性能特点：新型可调节式射灯，既可解决基础照明又可突出重点投射的照明需要。

适用场所：公园、酒店、餐厅、酒吧、别墅、商场等室内照明。



LY-TL-01A



LY-TL-02A



LY-TL-03A



LY-TL-04A

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温
TY-TL-01A	AC85~265V	3/6W	35,000 hrs	2700K~6500K
TY-TL-02A	AC85~265V	3/6W	35,000 hrs	2700K~6500K
TY-TL-03A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-04A	AC85~265V	10W	35,000 hrs	2700K~6500K

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温
TY-TL-05A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-06A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-07A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-08A	AC85~265V	5W	35,000 hrs	2700K~6500K
TY-TL-09A	AC85~265V	5W	35,000 hrs	2700K~6500K
TY-TL-10A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-11A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-12A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-13A	AC85~265V	7W	35,000 hrs	2700K~6500K
TY-TL-14A	AC85~265V	9W	35,000 hrs	2700K~6500K



LY-TL-05A



LY-TL-06A



LY-TL-07A



LY-TL-08A



LY-TL-09A



LY-TL-10A



LY-TL-11A



LY-TL-12A



LY-TL-13A



LY-TL-14A

LED PANEL LIGHT SERIES
LED 平板灯系列

Product Description

产品说明

Features:

The entire lamp illumination uniformity is good, to make people feeling soft and comfortable without losing the light and bright, as well as to relieve fatigue of people's eyes.

Applications:

Office, shopping mall, senior club and so on.

性能特点：整个灯具的照度均匀性好，光线感觉柔和舒适而不失明亮，可有效缓解眼睛疲劳。

适用场所：写字楼、商场、高级会所等室内照明。

Performance Summary



规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lumens 光通量	Color Temperature 色温	CRI 显色指数	Beam Angle 光束角度	Lamp Life 使用寿命	Measurement 产品尺寸	Fixing Ways 安装方式
LY-PNL-1	AC85~265V	12W	680ML	2800K~6000K 暖白,白光,冷白	80 Ra	110°	50,000 hrs	W300 x L300	in-built,Mounting Suspending
LY-PNL-2	AC85~265V	32W	1600ML	2800K~6000K 暖白,白光,冷白	80 Ra	110°	50,000 hrs	W600 x L600	in-built,Mounting Suspending
LY-PNL-3	AC85~265V	16W	850ML	2800K~6000K 暖白,白光,冷白	80 Ra	110°	50,000 hrs	W600 x L300	in-built,Mounting Suspending
LY-PNL-4	AC85~265V	32W	1600ML	2800K~6000K 暖白,白光,冷白	80 Ra	110°	50,000 hrs	W1200 x L300	in-built,Mounting Suspending




LY-PNL-1

Dimmable LED Panel Light
可调光LED平板灯




LY-PNL-2

Dimmable LED Panel Light
可调光LED平板灯



LY-PNL-3

Dimmable LED Panel Light
可调光LED平板灯



LY-PNL-4

Dimmable LED Panel Light
可调光LED平板灯

LED HIGH BAY SERIES
LED 工矿灯系列

Product Description

产品说明

Features:


Long lifespan, well heat dissipation, high brightness, energy saving.

Applications:

Can be widely applied to the factories, warehouses, supermarkets, and so are.

性能特点：使用寿命长、散热性能佳、亮度高、节能环保。

适用场所：可广泛应用于工厂、仓库、超市等。

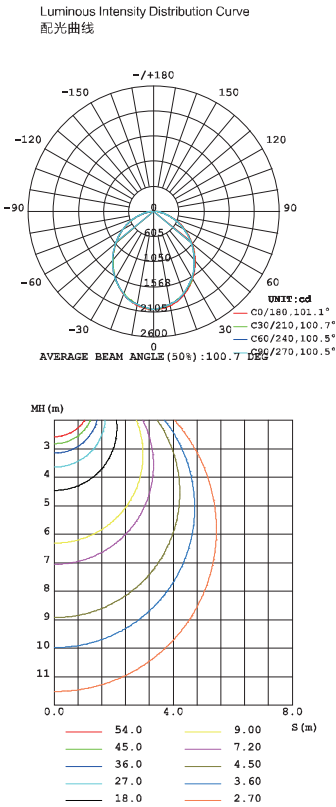

LY-HBL-1A



LY-HBL-1B



LY-HBL-1C



Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度
LY-HBL-1A	AC85~265V	30W	50,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C
LY-HBL-1B	AC85~265V	50W	50,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C
LY-HBL-1C	AC85~265V	80W	50,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C



LY-HBL-1D

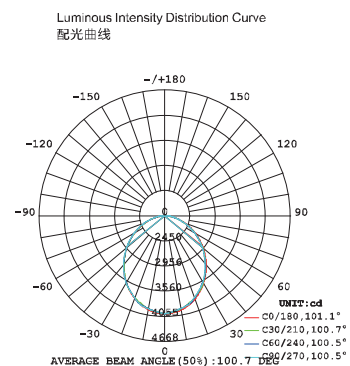

LY-HBL-1E

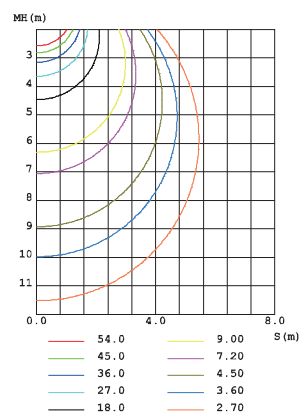



Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度
LY-HBL-1D	AC85-265V	150W	50,000 hrs	2700K-6500K	80 Ra	90~100 LM/W	-30°C-50°C
LY-HBL-1E	AC85-265V	250W	50,000 hrs	2700K-6500K	80 Ra	90~100 LM/W	-30°C-50°C



LY-HBL-2A

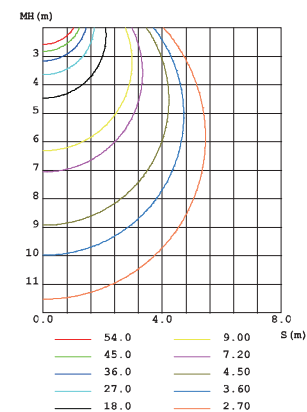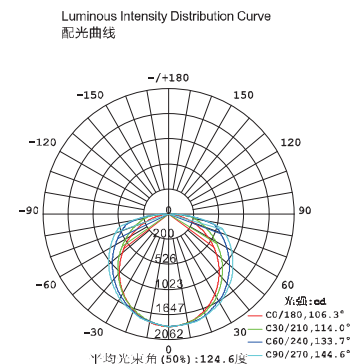

LY-HBL-2B

Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度
LY-HBL-2A	AC85-265V	100W	50,000 hrs	2700K-6500K	80 Ra	90~100 LM/W	-30°C-50°C
LY-HBL-2B	AC85-265V	150W	50,000 hrs	2700K-6500K	80 Ra	90~100 LM/W	-30°C-50°C



LY-HBL-3A



LY-HBL-3B

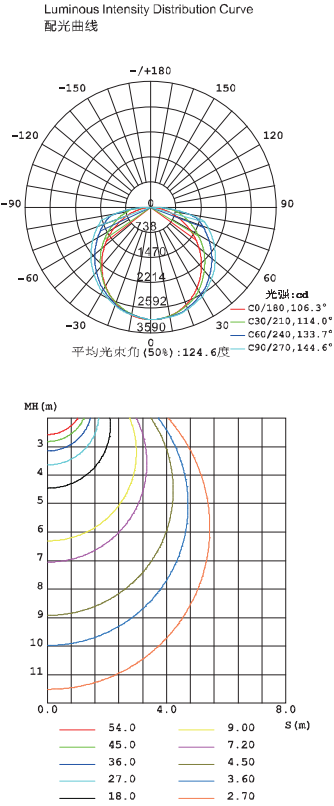

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度
LY-HBL-3A	AC85~265V	200W	50,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C
LY-HBL-3B	AC85~265V	250W	50,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C




LY-IND-1A



LY-IND-1B



LY-IND-1C

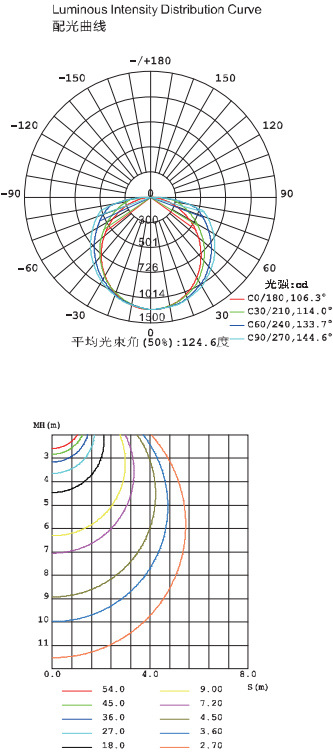

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度
LY-IND-1A	AC85~265V	50W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C
LY-IND-1B	AC85~265V	100W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C
LY-IND-1C	AC85~265V	150W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	CRI 显色指数	Lumens Efficacy 流明值	Working Temperature 工作温度	Measurement 产品尺寸
LY-INB-1A	AC85~265V	15W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C	Ø100XH148mm
LY-INB-1B	AC85~265V	27W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C	Ø130XH194mm
LY-INB-1C	AC85~265V	45W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C	Ø173XH249mm
LY-INB-1D	AC85~265V	60W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C	Ø204XH278mm
LY-INB-1E	AC85~265V	120W	35,000 hrs	2700K~6500K	80 Ra	90~100 LM/W	-30°C~50°C	Ø250XH336mm





LY-INB-1A 15W





LY-INB-1B 27W

Luminous Intensity Distribution Curve
配光曲线



Luminous Intensity Distribution Curve
配光曲线



LY-INB-1C 45W



LY-INB-1D 60W



LY-INB-1E 120W



LED OUTDOOR SERIES

LED 户外系列

LED FLOOD LIGHT SERIES

LED 投光灯系列

LED STREET LIGHT SERIES

LED 路灯系列

LED FLOOD LIGHT SERIES
LED 投光灯系列

Product Description


产品说明

Features:
The entire light is made of high quality aluminum alloy and toughened glass, to ensure dust resistance, sater resistance and explosion-proof; high luminosity efficiency, long lifespan and low power consumption.


Applications:
Widely used in billboard, square, building, theatre, park, garden etc.
性能特点：采用铝合金外壳，表面氧化处理，钢化玻璃，能够防爆、防水、防尘、光效高、寿命长、功耗低。
适用场所：广泛应用于广告牌、广场、大楼、剧院、公园、花园等。




Luminous Intensity Distribution Curve
配光曲线

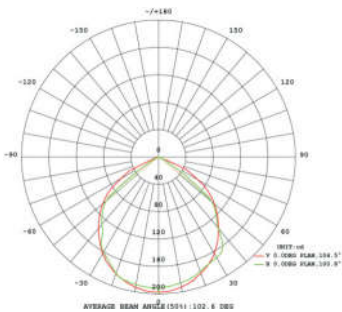


LY-FLIC-10W



Luminous Intensity Distribution Curve
配光曲线



LY-FLIC-20W




Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLIC-10W	AC85~265V	10W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W114 x W86 x H85mm
LY-FLIC-20W	AC85~265V	20W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W180 x W140 x H100mm




LY-FLIC-30W




Luminous Intensity Distribution Curve
配光曲线



LY-FLIC-50W





Luminous Intensity Distribution Curve
配光曲线



Performance Summary
规格参数



Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLIC-30W	AC85~265V	30W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W230 x W190 x H130mm
LY-FLIC-50W	AC85~265V	50W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W290 x W240 x H160mm

Luminous Intensity Distribution Curve
配光曲线

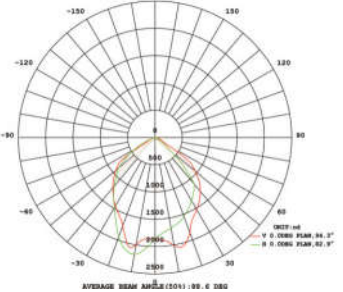

LY-FLIC-70W

Luminous Intensity Distribution Curve
配光曲线




LY-FLIC-100W

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLIC-70W	AC85~265V	70W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W290 x W325 x H160mm
LY-FLIC-100W	AC85~265V	100W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W330 x W403 x H160mm



LED INDOOR SERIES
LED 室内系列

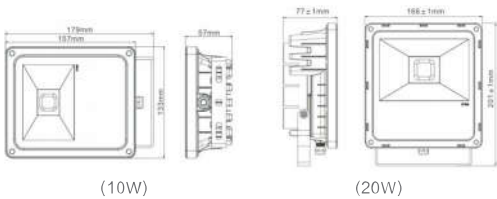

(10W)

(20W)


Luminous Intensity Distribution Curve
配光曲线

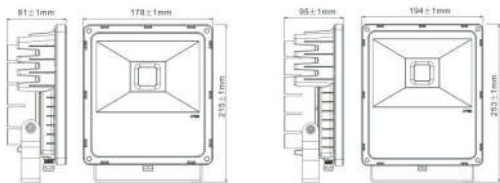

(30W)

(50W)


LY-FLD-30W/50W

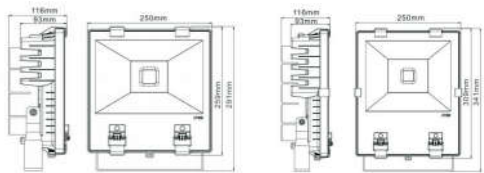

(70W)


(100W)

LY-FLD-70W/100W

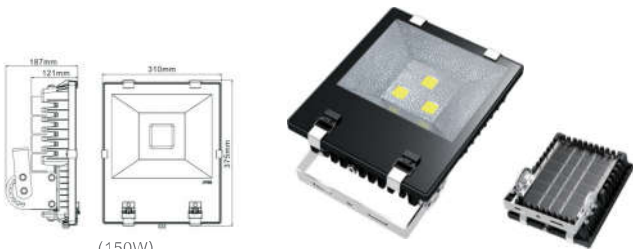

(150W)

LY-FLD-150W



(200W)

LY-FLD-200W

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLD-10W	AC85-265V	10W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W157 x W133 x H57mm
LY-FLD-20W	AC85-265V	20W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W166 x W201 x H77mm
LY-FLD-30W	AC85-265V	30W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W178 x W215 x H81mm
LY-FLD-50W	AC85-265V	50W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W194 x W253 x H95mm

Performance Summary

规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLD-70W	AC85-265V	70W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W250 x W259 x H116mm
LY-FLD-100W	AC85-265V	100W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W250 x W309 x H116mm
LY-FLD-150W	AC85-265V	150W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W310 x W375 x H187mm
LY-FLD-200W	AC85-265V	200W	35,000 hrs	2700K-6500K	-30°C-45°C	IP65	W340 x W395 x H187mm


Performance Summary

规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Ingress Protection 防护等级	Measurement 产品尺寸
LY-FLDB-80W	AC85~265V	80W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W157 x W133 x H57mm
LY-FLDB-160W	AC85~265V	160W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W166 x W201 x H77mm
LY-FLDB-320W	AC85~265V	320W	35,000 hrs	2700K~6500K	-30°C~45°C	IP65	W178 x W215 x H81mm




LY-FLDB-80W




Luminous Intensity Distribution Curve
配光曲线

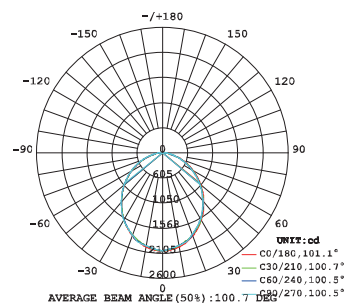


LY-FLDB-160W




Luminous Intensity Distribution Curve
配光曲线



Luminous Intensity Distribution Curve
配光曲线



LY-FLDB-320W



LED STREET LIGHT SERIES
LED 路灯系列

Product Description
产品说明


Features:
Energy saving, high luminous efficiency, long service life.

Applications:
Hotel, Restaurant, Villa, Mall and the other indoor lighting conditions.

性能特点：节能环保、高光效、使用寿命长
适用场所：道路、广场、花园小区



Luminous Intensity Distribution Curve
配光曲线



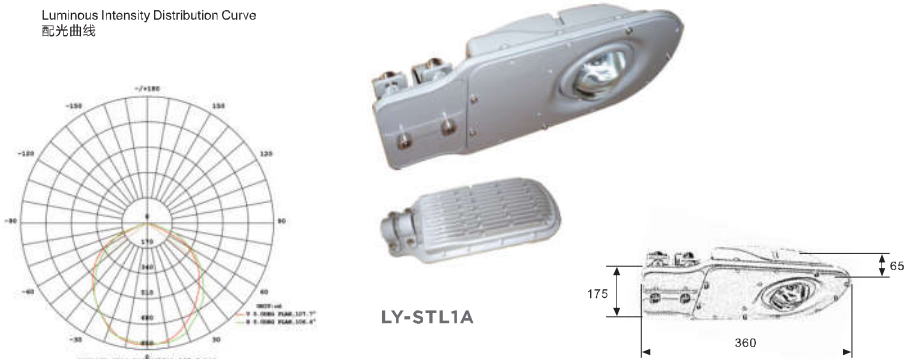


Luminous Intensity Distribution Curve
配光曲线






Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适用温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级
LY-STL1A	AC85~265V	30W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65
LY-STL1B	AC85~265V	70W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65

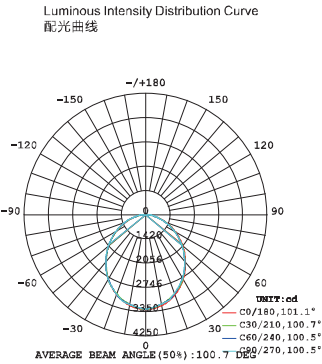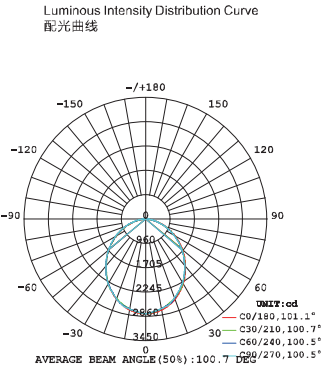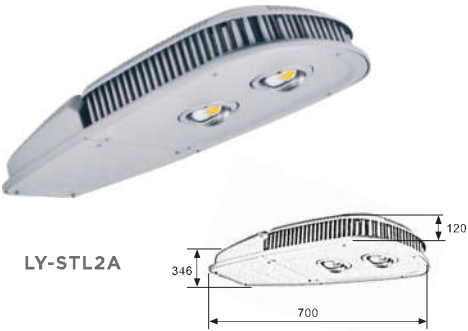

Performance Summary
规格参数





Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级
LY-STL2A	AC85~265V	160W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65
LY-STL2B	AC85~265V	200W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65

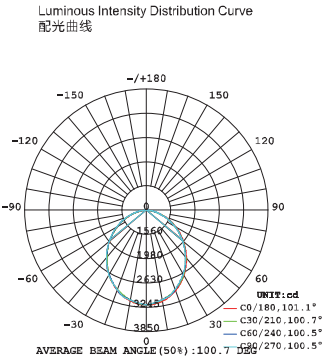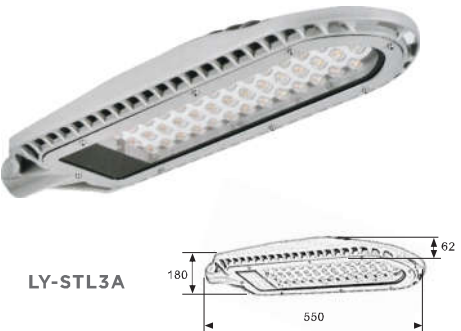

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级
LY-STL3A	AC85~265V	80W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65
LY-STL3B	AC85~265V	120W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65


LED INDOOR SERIES
LED 室内系列

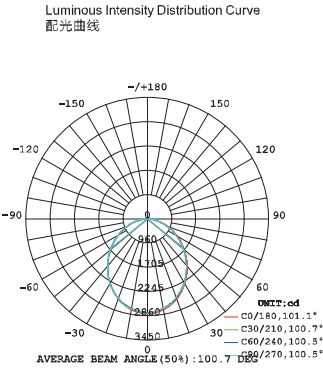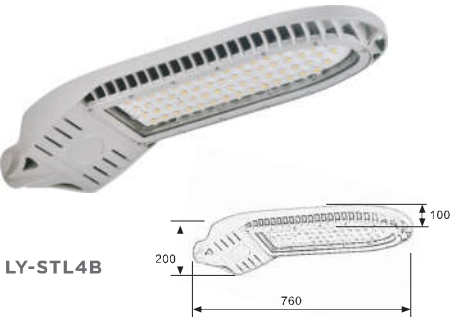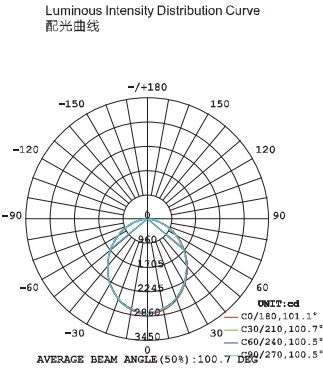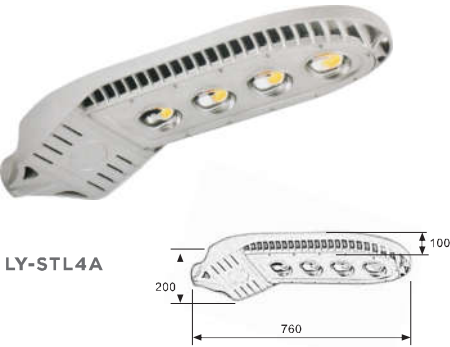

Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级
LY-STL4A	AC85~265V	150W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65
LY-STL4B	AC85~265V	150W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65

Luminous Intensity Distribution Curve
配光曲线



LY-STL5A

Luminous Intensity Distribution Curve
配光曲线




LY-STL5B

Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 适应温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级
LY-STL5A	AC85~265V	56W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65
LY-STL5B	AC85~265V	84W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65



LY-STLA6A



LY-STLA6B

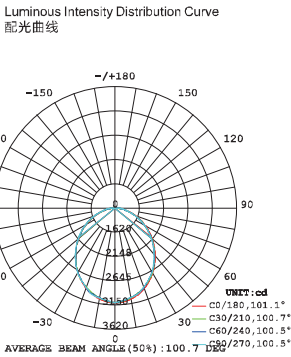


LY-STLA6C

Performance Summary
规格参数


Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 工作温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级	Material 材料
LY-STLA6A	AC85~265V	60W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65	Aviation aluminum 航空铝
LY-STLA6B	AC85~265V	90W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65	Aviation aluminum 航空铝
LY-STLA6C	AC85~265V	120W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65	Aviation aluminum 航空铝



LY-STLA6D



LY-STLA6E

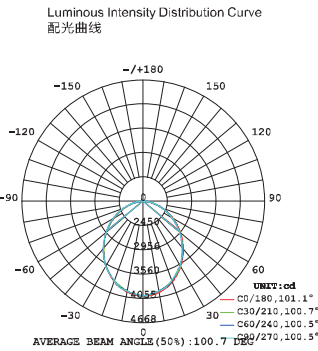

Performance Summary
规格参数

Model 型号	Input Voltage 输入电压	Power 功率	Lamp Life 使用寿命	Color Temperature 色温	Working Temperature 工作温度	Working Humidity 适应湿度	Harmonious Distortion 谐波	Ingress Protection 防护等级	Material 材料
LY-STLA6D	AC85~265V	150W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65	Aviation aluminum 航空铝
LY-STLA6E	AC85~265V	190W	50,000 hrs	2700K~6500K	-30°C~55°C	10%~90%	<%15	IP65	Aviation aluminum 航空铝