

广州市虎头实业有限公司 Guangzhou Tiger Head Industrial Co., Ltd

NO.132 North, Gongye Road, Haizhu District, Guangzhou, China

86-20-85539959

http://www.gztigerhead.com





COMPANYPROFILE



Guangzhou Tiger Head Industrial Co., Ltd is the backbone enterprise of Tiger Head Group, with a long history traced back to 1928.

As a large government-owned company, Tiger Head Industrial focuses on diversified development and makes huge investment in R&D, purchasing, producing and marketing. Now we deal with various products including lead acid storage batteries, solar products, lighting products, polymer Li-ion batteries, jump starters, battery electric appliances, battery raw material, tomato paste, baby diapers, etc.

We pay much attention to quality. All products are under strict quality control in every process from raw material purchasing to final product testing. With high quality and good service, we win our customers' faith and our products sell well in the world, especially in Africa, Middle East, Asia, South America, Europe, etc.

Tiger Head Industrial and its parent company Tiger Head Battery Group share some famous brands, such as "Tiger Head", "555", "TIHAD", "Lighting", "funmily", "Wivin", etc. Tiger Head Industrial devotes to strengthening our brands and continuing to develop excellent products. We optimize allocation of resources globally and build core competitiveness, striving to realize a win-win business with our partners. Look forward to the future, with your trust and support, Tiger Head Industrial continues to develop excellent products and offering the best service. Let's work together, embrace a flourishing future!

TECHNOLOGY RESEARCH AND DEVELOPMENT

BATTERY WORKSHOP







ISMT WORKSHOP







IFINAL ASSEMBLY WORKSHOP













HIGH-EFFICIENT


CAR JUMP STARTER







JUMP STARTER SPECFICATION							
Ca	pacity	Fully charge		Cycle life			
8000m	Ah/29.6 Wh	3- 4	nours ≤7.0h	1000 times			
Output	USB output	Start current Peak current		Operating Temperature			
12V	5V/2A	200A	450A	0°C~60°C			
PCS/CARTON	CTN(cm)	N W.(KGS)		G.W.(KGS)			
10	134*69*26mm (L/W/H)	9		10			
	Wireless Charger						
Ma	aterial	Output					
Black/White	Glass Mirror	5W/10W					

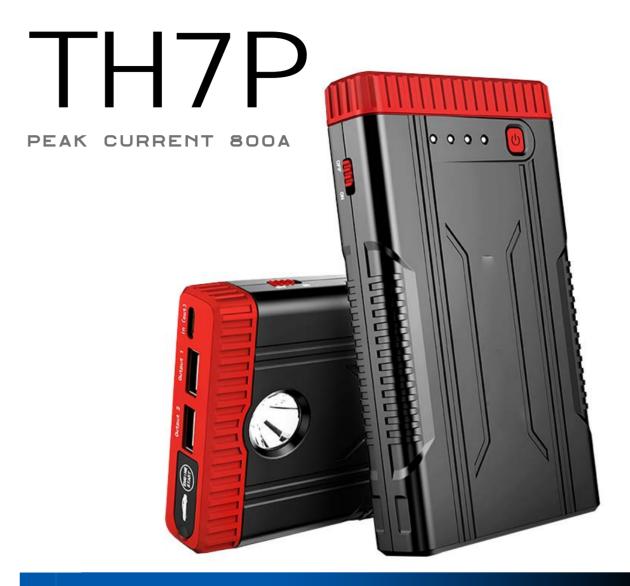

HIGH-EFFICIENT CAR JUMP STARTER







JUMP STARTER SPECFICATION						
Ca	apacity	Fully charge		Cycle life		
7200m/	Ah/26.64WH	2 huors		1000 times		
Input	USB output	Start current	Peak current	Operating Temperature		
5V/3A	5V/3A 9V/12A 12V/1.5A	400A	800A	-20℃ to 60℃		





TH-M8

HIGH-EFFICIENT Fast Charging and Discharging



JUMP STARTER SPECFICATION						
Capacity		Fully charge		Cycle life		
80	8000mAh		hours	1000 times		
Output	USB output	Start current	Peak current	Operating Temperature		
5V/12V	5V/3A: 5V/3A	200A	400A	-20℃ to 60℃		

TH19

HIGH-EFFICIENT Fast Charging GAR JUMP STARTER



	JUMP STARTER SPECFICATION						
Ca	pacity	Fully	charge	Cycle life			
160	00mAh	5-6 hours		1000 times			
Output	USB output	Start current	Peak current	Operating Temperature			
5V/12V	5V/2A: 5V/1A	450A	900A	-20℃ to 60℃			

 $\mathbf{5}$









8000 MAH 29.60WH PEAK CURRENT 400A



JUMP STARTER SPECFICATION

Capacity		Fully charge		Cycle life
8000mAh/29.60WH		6 - 7 hours		1000 times
Output	USB output	Start current	Peak current	Operating Temperature
12V	5V/2A	200A	400A	-20℃ to 60℃
PCS/CARTON	CTN(cm)	PCS/CTN		G.W.(KGS)
10	38.0x27.0x24.0	12		9

HIGH-EFFICIENT

CAR JUMP STARTER

















JUMP STARTER SPECFICATION

Capacity		Fully charge		Cycle life
11100m	11100mAh/41.07WH		l.5 hours	1000 times
Output	USB output	Start current	Peak current	Operating Temperature
12V	5V/2A ; 5V/1A	300A	450A	-20℃ to 60℃
PCS/CARTON	CTN(cm)	PCS/CTN		G.W.(KGS)
10	40.0x36.5x25.1	10		11

HIGH-EFFICIENT CAR JUMP STARTER















GL7

13500 MAH 49.95WH PEAK CURRENT 450A



JUMP STARTER SPECFICATION						
Сар	pacity	Fully	charge	Cycle life		
13500 mAh/49.95WH		3.5 - 4.5 hours		1000 times		
Output	USB output	Start current Peak current		Operating Temperature		
12V	Type C 5V/3A 5V/2A	300A 450A		-20℃ to 60℃		
PCS/CARTON	CTN(cm)	N.W.(KGS)		G.W.(KGS)		
10	40 x 36.5x 25.1	10.80		11.80		





HIGH-EFFICIENT CAR JUMP STARTER









JUMP STARTER SPECFICATION						
Ca	pacity	Fully	charge	Cycle life		
19200 mAh/71.04 WH		3- 4 hours		1000 times		
Output	USB output	Start current	Peak current	Operating Temperature		
19V/16V/12V	Type C 5V/3.5A 5V/2A	350A	700A	-20℃ to 60℃		
PCS/CARTON	CTN(cm)	PCS/CTN		G.W.(KGS)		
10	40.0x36.5x25.1	8		12		





25200 MAH 93.24WH PEAK CURRENT 1000A



CAR JUMP STARTER



JUMP STARTER SPECFICATION						
Capacity Fully charge Cycle life						
25200 MA	25200 MAH/93.24WH		nours	1000 times		
Output	USB output	Start current	Peak current	Operating Temperature		
12V/24V	5V/2A	400A 1000A		-20℃ to 60℃		
PCS/CARTON	CTN(cm)	N.W.(KGS)		G.W.(KGS)		
5	40 x 36.5x25.1	10.80		11.80		

4Steps for using jump starter

ONE step:



Red clamp connect"+" black clamp connec"-"

Three step:



Start the vehicle (<3 seconds for one time)

TWO step:



Plug the cable into the jump starter

Four step:



Remove the plug from the jump starter then remove the clamps



Notice:

Before start the car, make sure the product still has enough power (at least 2 lights).